

# Instructions for "Print All" Set-Up


## Hyosung / `Tranax

### Function Description

The PRINT ALL SETUP function is used to print all parameters of the system.

### Print all setup


### Accessing the PRINT ALL SETUP

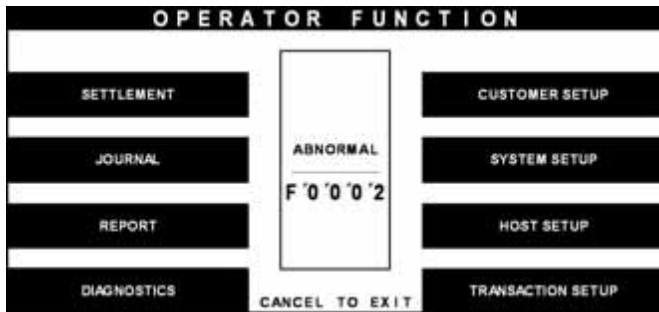

1) Select 'REPORT' in the OPERATOR FUNCTION menu.



2) Select 'PRINT ALL SETUP' in the REPORT menu.

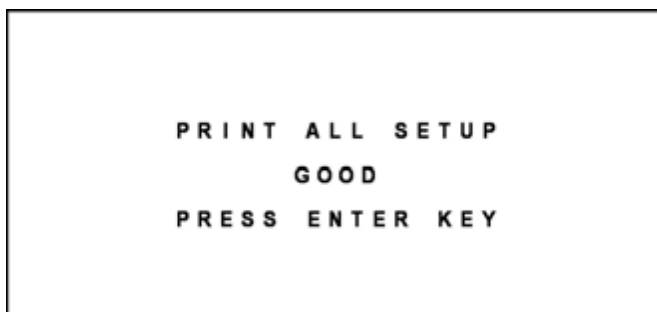

3) All setup parameters will be printed from the Receipt Printer. If the GOOD message appears, press "ENTER".

4) Please send this report to us at 1038 Route 88, Ste 2, Point Pleasant, NJ 08742 or e-mail to [peggy@oceanatm.com](mailto:peggy@oceanatm.com). You may also fax them to us at (877) 538-8929.

## **Triton / Tidel Models**

Please call us at 732-899-9009, ext. 1000 for instructions on how to check your codes.